

## Installation Instructions for 1015 & 1017

### Rated Voltage 220-240V, 50Hz

**PLEASE READ AND SAVE ALL INSTRUCTIONS CAREFULLY BEFORE USING THE PRODUCT**

**WARNING** - to reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation.

#### **INSTALLATION REQUIREMENTS:**

- **Must be installed by a Licensed Electrician.**
- **Must be installed according to the current wiring rules.**
- **Do not exceed the maximum wattage rating, as this may cause overheating.**
- **Suitability for use “outdoors” IP44.**
- **Insulation class: CLASS I**

#### **INSTALLATION DIRECTION:**

- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
  - Ensure all power connection is off for your own safety.
  - Level all the components on a smooth surface and make sure there is no component missing before assembly.
  - Select a suitable location for installation. The mounting point must be able to support 4 times the weight of the fitting.
1. Drill the holes on the ground and hammer the anchors (H) into the holes.
  2. Secure the mounting plate (G) onto the wall via screws (F) provided. Ensure the screws used are suitable for the mounting surface.
  3. Open the junction box (K) by loosening the screws (J). Connect the mains supply wire to the light fitting using the terminal block (I) in the junction box. Ensure that the wires are secure and no bare wires are exposed.

#### **Mains Supply Wire**

Earth – Yellow/Green 

Neutral – Blue or Black

Live – Brown or Red


#### **Fitting Wire**

Corresponding terminal marked 

Corresponding terminal on the lampholder Marked “N”

Corresponding terminal on the lampholder Marked “L”

4. Secure back the cover of junction box by tightening the screws.
5. Secure the lamp base (E) onto the mounting plate via tightening the screws (A) and washers (B).
6. Install the bulb (D - not included) to the lamp holder. (Ensure all seals are in correct position to maintain IP44 rating. Note: Do not exceed recommended bulb wattage.)
7. Thread the lamp shade (C) onto the fitting.
8. Turn on power and enjoy your new lighting product.

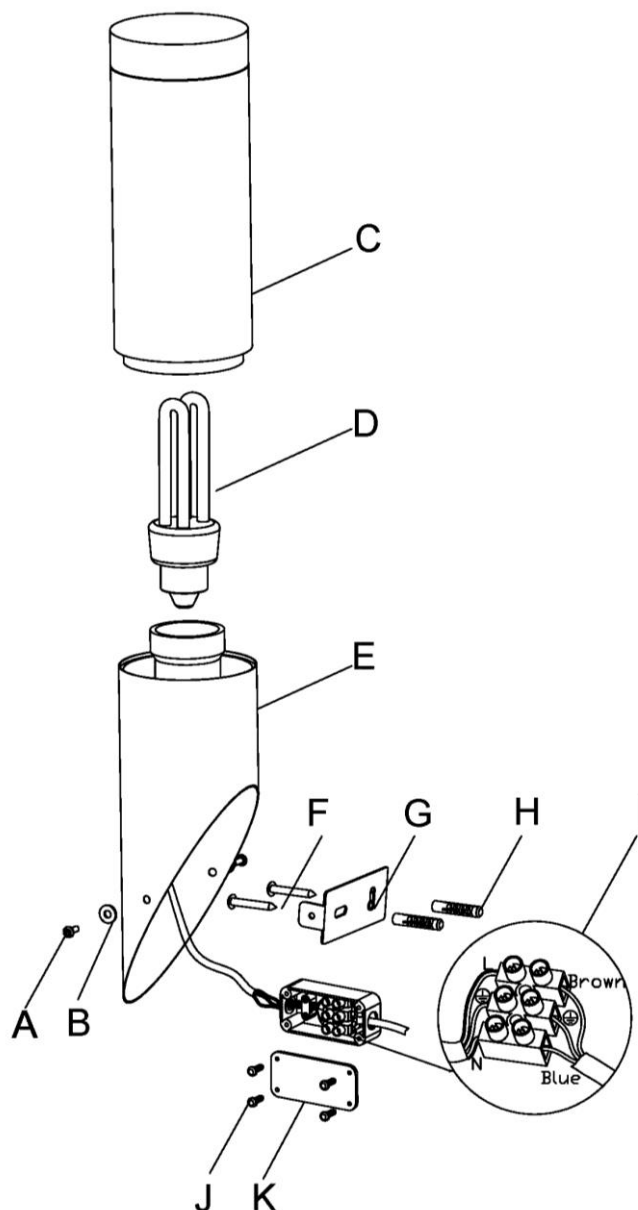

### **TIPS**

1. To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
2. Handle the fitting and cover/shade with care to avoid breakage.
3. When changing or cleaning bulbs, turn OFF power and allow to cool. Do not touch bulbs with bare hands, use gloves or a tissue.
4. Find a suitable location away from liquids and hazards.
5. Ensure that the fitting does not come in contact with corrosive chemicals, etc.
6. To clean, wipe with a damp clean cloth. Never soak the fitting with water.

### **SPECIFICATIONS:**

Code #	Rated Voltage	Lamp holder	Finish	Rated wattage
1015	220-240V/50Hz	ES/E27	Stainless	1 x 15W CFL or 10W LED Max
1017	220-240V/50Hz	ES/E27	Sanded Black	1 x 15W CFL or 10W LED Max

# **MAINTENANCE OF OUTDOOR LIGHTS**

## **BEFORE INSTALLING AN OUTDOOR LIGHT FITTING:**

**Ensure that all screws and movable parts are covered in Copper slip, Inox or Vaseline, this will help prevent oxidization and allow for easy maintenance of replacement bulbs.**

**In coastal locations the treatment must be repeated four times a year.**