## MIRAMAR CEILING LAMP CODE#1407 & 1410

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

## Installation Requirements

- Must be installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.
- This luminaire needs to be installed in places where out of arms reach of people.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation;
  - This product is suitable for indoor use only.
  - The mounting point must support 2 times the weight of the fitting.
  - Ensure the fitting is not installed in direct line of an air vent/system.
  - When installing a fitting in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under the warranty period.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before
  assembling. If parts are missing, return the complete product to the place of purchase for inspection or
  replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

## Installation Directions

- 1. Remove all packaging material from the product and be careful not to throw away any accessories that maybe hidden within the packaging material.
- 2. Install the ceiling plate (2) onto the ceiling by using appropriately sized mounting screws (4) and anchors (1). Ensure the screws (4) and anchors (1) used are suitable for the mounting surface and surrounding environment.
- 3. Remove the cover (8) from the terminal block (7) and connect the mains supply wire to the terminal block.


Mains Supply Wire Fitting Wire

Earth – Yellow/Green 🖶 Yellow/Green or 😩

Neutral – Blue or Black Blue Live – Brown or Red Brown

- 4. Ensure the wires are secure and no bare wires are exposed. Install the cover back over the terminal block.
- 5. Install the glass (5) onto the ceiling plate (2) and secure by tightening the screws (6).
- 6. Install a globe (3 not included) into the lamp holder. Do not exceed the maximum wattage rating.
- 7. After the installation, switch on the fitting to test and enjoy your new lighting product.

1 | Page v1.0

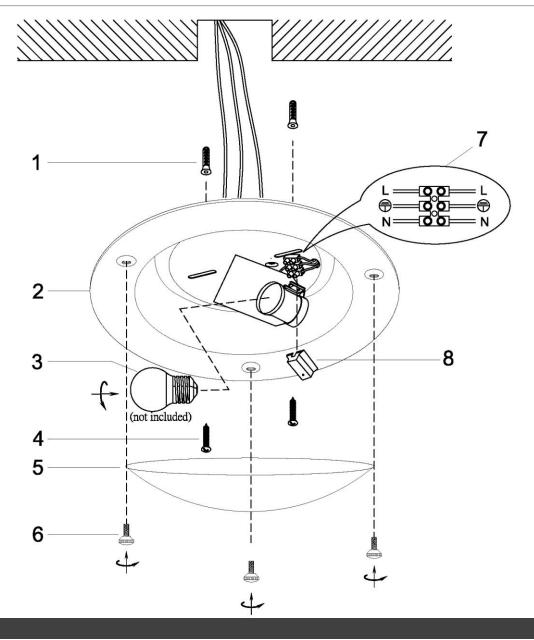

## Safety Tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a dry cloth. Never soak the fitting with water.

Specifications		
CODE #	1407	1410
Colour	Matt white	Satin nickel
Rated Voltage	220-240V~ 50Hz	
Rated Wattage	40W or 5W LED	
Lamp Holder	ES/E27	
Dimensions	Dia.:285mm	H:80mm

**2** | Page v1.0