

Installation Instructions for 1002, 1016, 1208 & 1209
Rated Voltage 220-240V, 50Hz

PLEASE READ AND SAVE ALL INSTRUCTIONS CAREFULLY BEFORE USING THE PRODUCT

WARNING - to reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation.

INSTALLATION REQUIREMENTS:

- **Must be installed by a Licensed Electrician.**
- **Must be installed according to the current wiring rules.**
- **Do not exceed the maximum wattage rating, as this may cause overheating.**
- **Suitability for use “outdoors”IP44.**
- **Insulation class: CLASS I**

INSTALLATION DIRECTION:

- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure all power connection is off for your own safety.
- Level all the components on a smooth surface and make sure there is no component missing before assembly.
- Select a suitable location for installation. The mounting point must be able to support 4 times the weight of the fitting.

1. Remove the top section of cylinder cover (⑦) by counter clockwise.
2. Remove the cover from the terminal box by loosening the screws (②), and connect the mains supply wire to the terminal block (①). Ensure the wires are secure and no bare wires are exposed.
Install the cover back over the terminal box.

Mains Supply Wire

Earth – Yellow/Green 

Neutral – Blue or Black

Live – Brown or Red


Fitting Wire

Yellow/Green or 

Blue or N

Brown or L

3. Fix the cable to the bracket on junction box by fastening the screws (③).
4. Install globes (⑥- not included) into the lamp holders. Do not exceed the maximum wattage rating.
Reposition the top section of cylinder cover (⑦) by clockwise.
5. Select a suitable location for the lamp. See the installation requirements above.
6. Install the fitting (⑤) to the ground by using appropriately sized mounting screws and anchors (④).
Ensure the screws and anchors (④) used are suitable for the mounting surface and the surrounding environment.
7. After the installation, switch on the fitting to test and enjoy your new lighting product.

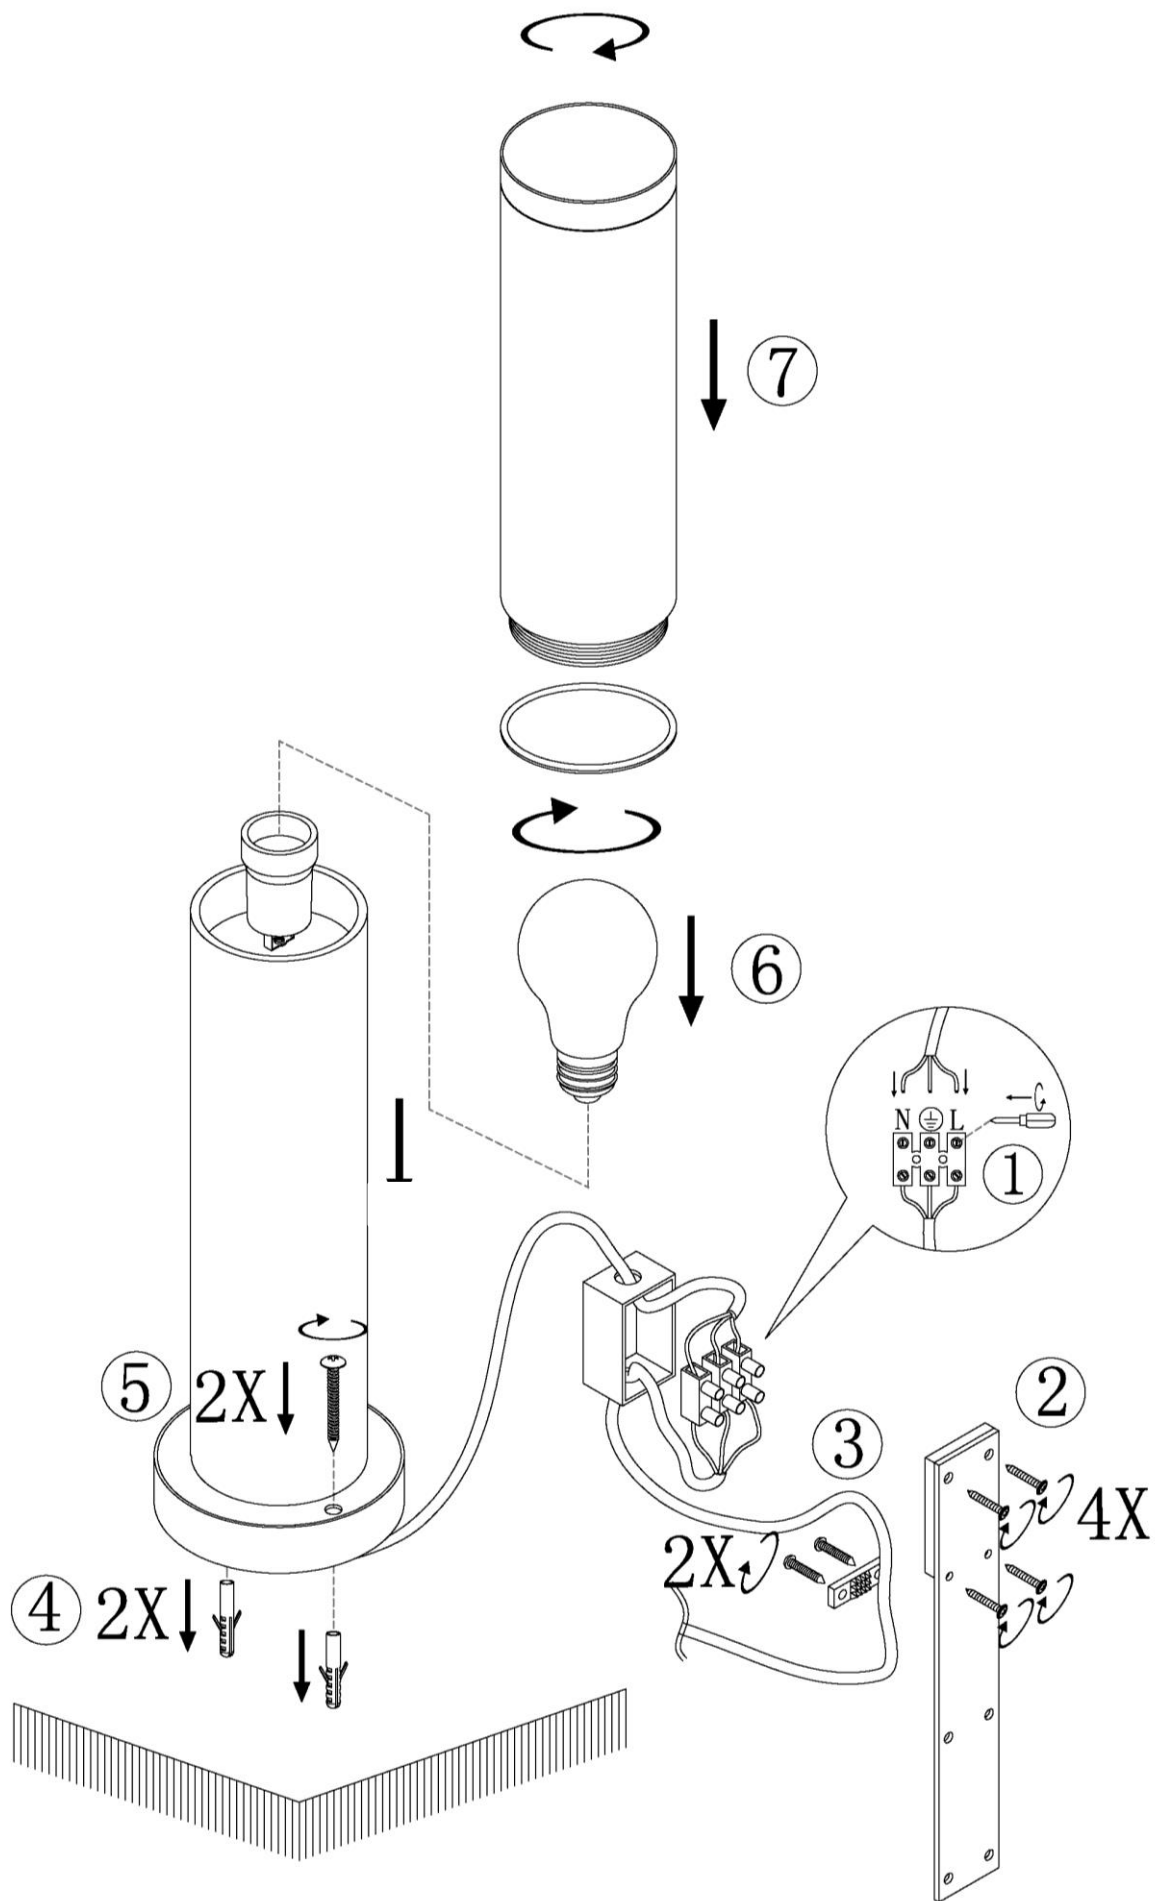

TIPS

1. To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
2. Handle the fitting and cover/shade with care to avoid breakage.
3. When changing or cleaning bulbs, turn OFF power and allow to cool. Do not touch bulbs with bare hands, use gloves or a tissue.
4. Find a suitable location away from liquids and hazards.
5. Ensure that the fitting does not come in contact with corrosive chemicals, etc.
6. To clean, wipe with a dry cloth. Never soak the fitting with water.

SPECIFICATIONS:

Model #	1002	1016	1208	1209
Finish/Colour	Black	#304 Stainless Steel	Black	#304 Stainless Steel
Insulation Class	Class I			
Rated Voltage	220-240V~ 50Hz			
Rated Wattage	10W LED			
IP Rating	IP44			
Dimension	Dia.:113mm H:800mm		Dia.:113mm H:450mm	

MAINTENANCE OF OUTDOOR LIGHTS

BEFORE INSTALLING AN OUTDOOR LIGHT

FITTING:

Ensure that all screws and movable parts are covered in Copper slip, Inox or Vaseline, this will help prevent oxidization and allow for easy maintenance of replacement bulbs.

In some locations the treatment must be repeated four times a year.