

Installation Instructions

NOX CEILING LIGHT

CODE#1475

Rated Voltage 220-240V~, 50Hz

Thank you for purchasing this quality product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation, and use. Please keep the instructions for future reference.


Warranty

- Please retain proof of purchase and evidence of assembly and installation by a licensed electrician.
- If the fitting is not assembled and installed by a licensed electrician, the warranty will be void.
- Warranty will be void if there is any damage due to improper usage or modification to the product.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation requirements

- Must be installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation.
 - This product is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the fitting.
 - Ensure the fitting is not installed in direct line of an air vent/system.
 - When installing a fitting in an area prone to moisture, ensure that the area is well ventilated, and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under the warranty period.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure that there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.


Installation directions

1. Remove all packaging material from the product.
2. Fix the nipple (7) to the coupling on the base (5), with the washer and nut (11) to tighten.
3. Hammer the plastic anchor (1) to the ceiling.
4. Connect the mains supply to the terminal block (2), using the following colour code for the wiring:
 - Connect the brown wire to the corresponding terminal on the terminal block Marked “L”
 - Connect the blue wire to the corresponding terminal on the terminal block marked “N”
 - Connect the yellow & green wire to the corresponding terminal on the terminal block marked “

1 | Page

Installation Instructions

6. Install the bulb (not included) onto the lampholder, the bulb must not exceed the maximum wattage rating on the label.
7. Attach the glass (6) through the nipple (7), with the rubber pad and nut (8) to secure. And then use the bottom finial (10) to fix the bottom cap (9) to the nipple (7) until tight.
8. After the installation, switch on the fitting to test and enjoy your new lighting product.

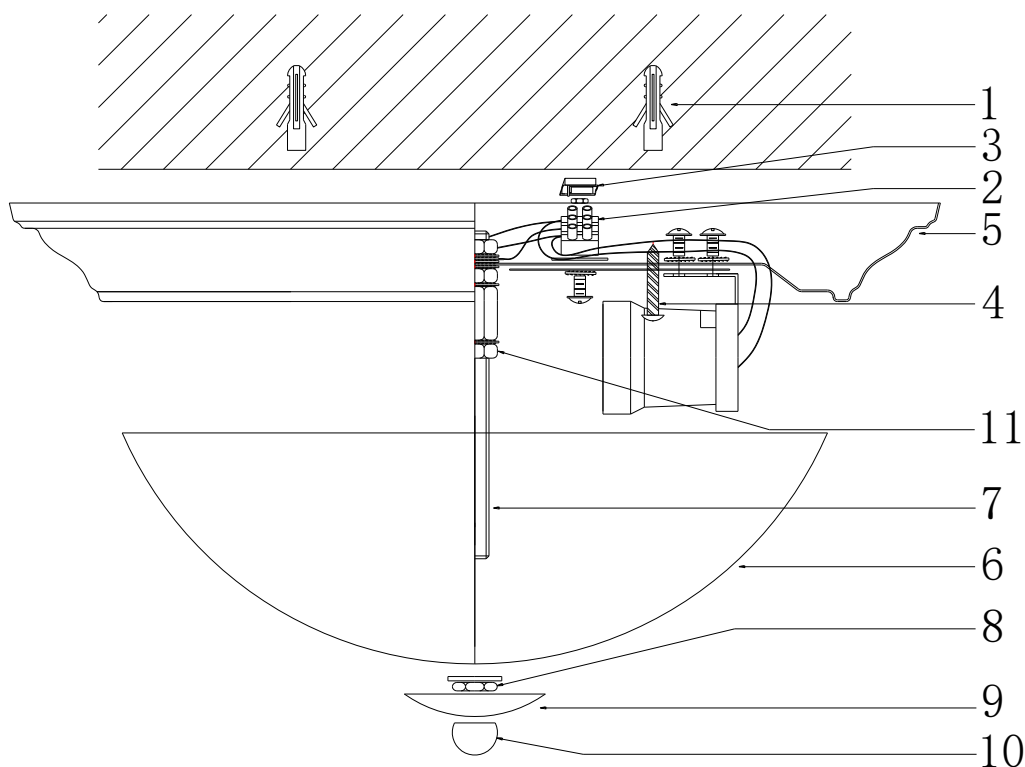

Safety tips

- Always ensure the power is OFF and the product has cooled down before performing any maintenance, cleaning, or adjustment to the product.
- To avoid injury or damage to the product, ensure that power leads and screws are secure before connecting the power.
- Handle the product and/or shade with care to avoid any damage or breakage.
- Select a suitable location away from liquids and hazards.
- Ensure that the product does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a dry cloth. Never soak the product with water.

Specifications

Code#	1475
Colour/Finish	Matt Black and White Glass
Rated Voltage	220-240V~, 50Hz
Rated Wattage	Max.60W or LED 10W
Lamp Holder	ES/E27
Weight	1.1kg
Dimensions	Dia.:330mm H:130mm