KATANA CEILING LAMP

CODE# 1479

Rated Voltage 220-240V~, 50Hz

Thank you for purchasing this quality product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use. Please keep the instructions for future reference.

Warranty

- Please retain proof of purchase and evidence of assembly and installation by a licensed electrician.
- If the fitting is not assembled and installed by a licensed electrician the warranty will be void.
- Warranty will be void if there is any damage due to improper usage or modification to the product.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation requirements

- Must be installed by a licensed electrician.
- All wiring and installation of the light fitting must adhere to local and national wiring rules.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation;
 - This product is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the fitting.
 - Ensure the fitting is not installed in direct line of an air vent/system.
 - When installing a fitting in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under the warranty period.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure that there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which
 appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or
 replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation directions

- 1. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material.
- 2. Remove the mounting bracket from the canopy by loosening the screws.
- 3. Use the mounting bracket as a template to mark the screw positions on the ceiling.
- 4. Install the mounting bracket onto the ceiling by using appropriately sized mounting screws and anchors. Ensure the screws and anchors used are suitable for the mounting surface and surrounding environment. (Fig 1)

1 | Page v1.1

Installation Instructions

5. Connect the mains supply wire to the terminal block. Ensure the wires are secure and no bare wires are exposed. (Fig 2)

Mains Supply Wire Fitting Wire

Earth – Yellow/Green (Yellow/Green or (

Neutral – Blue or Black Blue or N
Live – Brown or Red Brown or L

6. Install the canopy onto the mounting bracket by tightening the screws. (Fig 3)

7. After the installation, switch on the fitting to test and enjoy your new lighting product.

Safety tips


- Always ensure the power is OFF and the product has cooled down before performing any maintenance, cleaning or adjustment to the product.
- To avoid injury or damage to the product, ensure that power leads and screws are secure before connecting the power.
- Handle the product and/or shade with care to avoid any damage or breakage.
- Select a suitable location away from liquids and hazards.
- Ensure that the product does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a dry cloth. Never soak the product with water.

Specifications	
SKU#	1479
Colour/Finish	Black
Rated Voltage	220-240V∼, 50Hz
LED Spec	20W, 5000K, 1300lm
Weight	1.8 kgs
Dimensions	Dia.: 550mm H: 125mm

CAUTION: The light source of lamp cannot be replaced, please replace a whole new lamp if the light source is broken.

2 | Page v1.1

INSTALLATION DESCRIPTION

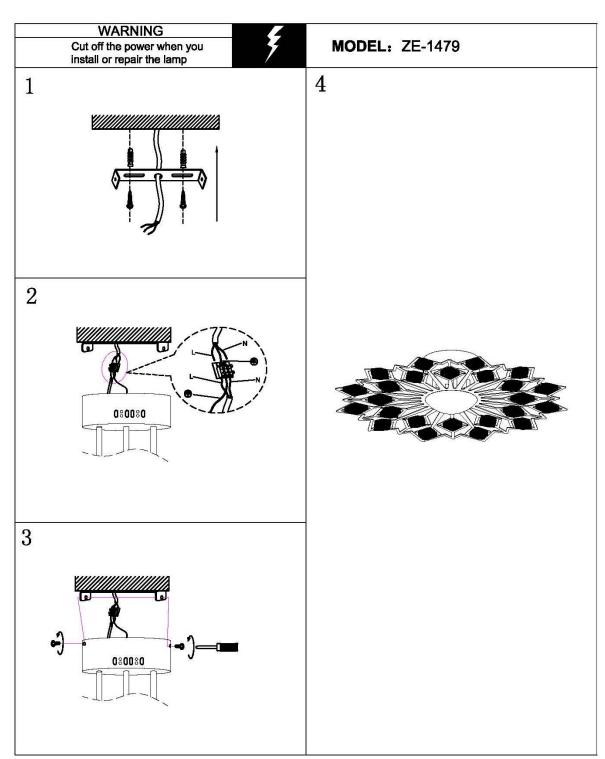

REMARKS: The bulb can not touch the lampshade.

If the outer wires were damaged, the wires should be changed by the manufacturer or a service agent or an egilible person to avoid any risks that would be occured.

3 | Page v1.1