

PIVOT 32 LIGHT PENDANT

SKU# 3468

Rated Voltage 220-240V~ 50Hz

Thank you for purchasing this quality product. To ensure correct function and safety, please read and follow all instructions carefully before assembly, installation and use of this product. Please keep instructions for future reference.

Warranty

- The warranty is from date of purchase, not the date of installation.
- If the fitting is not assembled and installed by a licensed electrician the warranty will be void.
- Please retain proof of purchase and evidence of assembly and installation by a licensed electrician.
- Warranty will be void if there is any damage due to improper usage or modification to the fitting.
- Failure to comply with the instructions in this manual may increase the risk of damage or injury and will void warranty.

Installation Requirements

- This fitting must be assembled and installed by a licensed electrician.
- All wiring and installation of the fitting must adhere to local and national wiring rules.
- This fitting is Class I and must be earthed.
- Do not exceed the maximum wattage rating.
- Select a suitable location for installation:
 - This fitting is suitable for indoor use only.
 - The mounting point must support 2 times the weight of the fitting. If you are unsure about the nature of your ceiling, consult a qualified installation contractor.
 - Ensure the fitting is not installed in direct line of an air vent/system.
 - When installing a fitting in an area prone to moisture, ensure that the area is well ventilated and an appropriately rated exhaust fan is used if required. Damage or corrosion caused by moisture is not a product fault, and as such is not covered under warranty.
- Take care not to pull any electrical wires during unpacking as this may damage the connection.
- Lay out all the components on a smooth surface and make sure there are no components missing before assembling. If parts are missing, return the complete product to the place of purchase for inspection or replacement.
- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
- Ensure power to the circuit you are working on has been switched OFF before commencing any electrical work.

Installation Directions

1. Select the type of installation you require before assembly and installation:

This light fitting can be installed as a Pendant or Close to Ceiling.

Refer to the corresponding instructions and diagram for the different installation methods.

NOTE: Assembly and installation of this fitting must be done by a licensed electrician.

NOTE: Due to the size/weight of the fitting, two people or more may be required to lift up the fitting during installation.

Installation Instructions


2. Remove all packaging material from the product and be careful not to throw away accessories that may be hidden within the packaging material. To help with assembly, lay the fitting on its side on a smooth non scratch surface.

FOR PENDANT INSTALLATION (Refer to the steps given on page 1 followed by the steps below)


3. Determine the suspension length required for your installation location.
4. Join the arms (S) and the straight tubes (T).
5. Spread the fitting arms (R) out, so they are evenly spaced and match the base (Q). Fix the arm (R) to the base (Q) tightening by the spanner (P).
- NOTE: Adjust the arms apart from each other to make sure all are straight and evenly surround the base after locked in position.**
6. Make the holes on plate and base are lined up properly, and fix the plate (O) to the base (Q) by tightening the screws (N) , nuts (M) and the finial (L)
7. Fix the rods (K) to the base (Q), use the nut to secure the upper canopy (J) to the tube (K).
8. Install the safety cable (E) onto the mounting bracket (B) and secure using the cable interlocker (C).

- NOTE: The full load/weight of the pendant must always be on the Safety cable (E) suspension not the cord.**
9. Use the mounting bracket (B) as a template to mark the screw positions on the ceiling.
10. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (D) and anchors (A). Ensure the screws (D) and anchors (A) used are suitable for the mounting surface and surrounding environment.
11. Remove the cover from the terminal block (F) and connect the mains supply wire.


Mains Supply Wire

Earth – Yellow/Green 
Neutral – Blue or Black
Live – Brown or Red

Luminaire Wire / Terminal Block

Yellow/Green or 
Blue or N
Brown or L

12. Ensure the wires are secure and no bare wires are exposed. Install the cover back over the terminal block (F).
13. Install the upper canopy (J) onto the mounting bracket (B) and secure by tightening the screws (I).
14. Install globes (V - not included) into the lamp holders (U). Do not exceed the maximum wattage rating.
15. After the installation, switch on the fitting to test and enjoy your new lighting product.

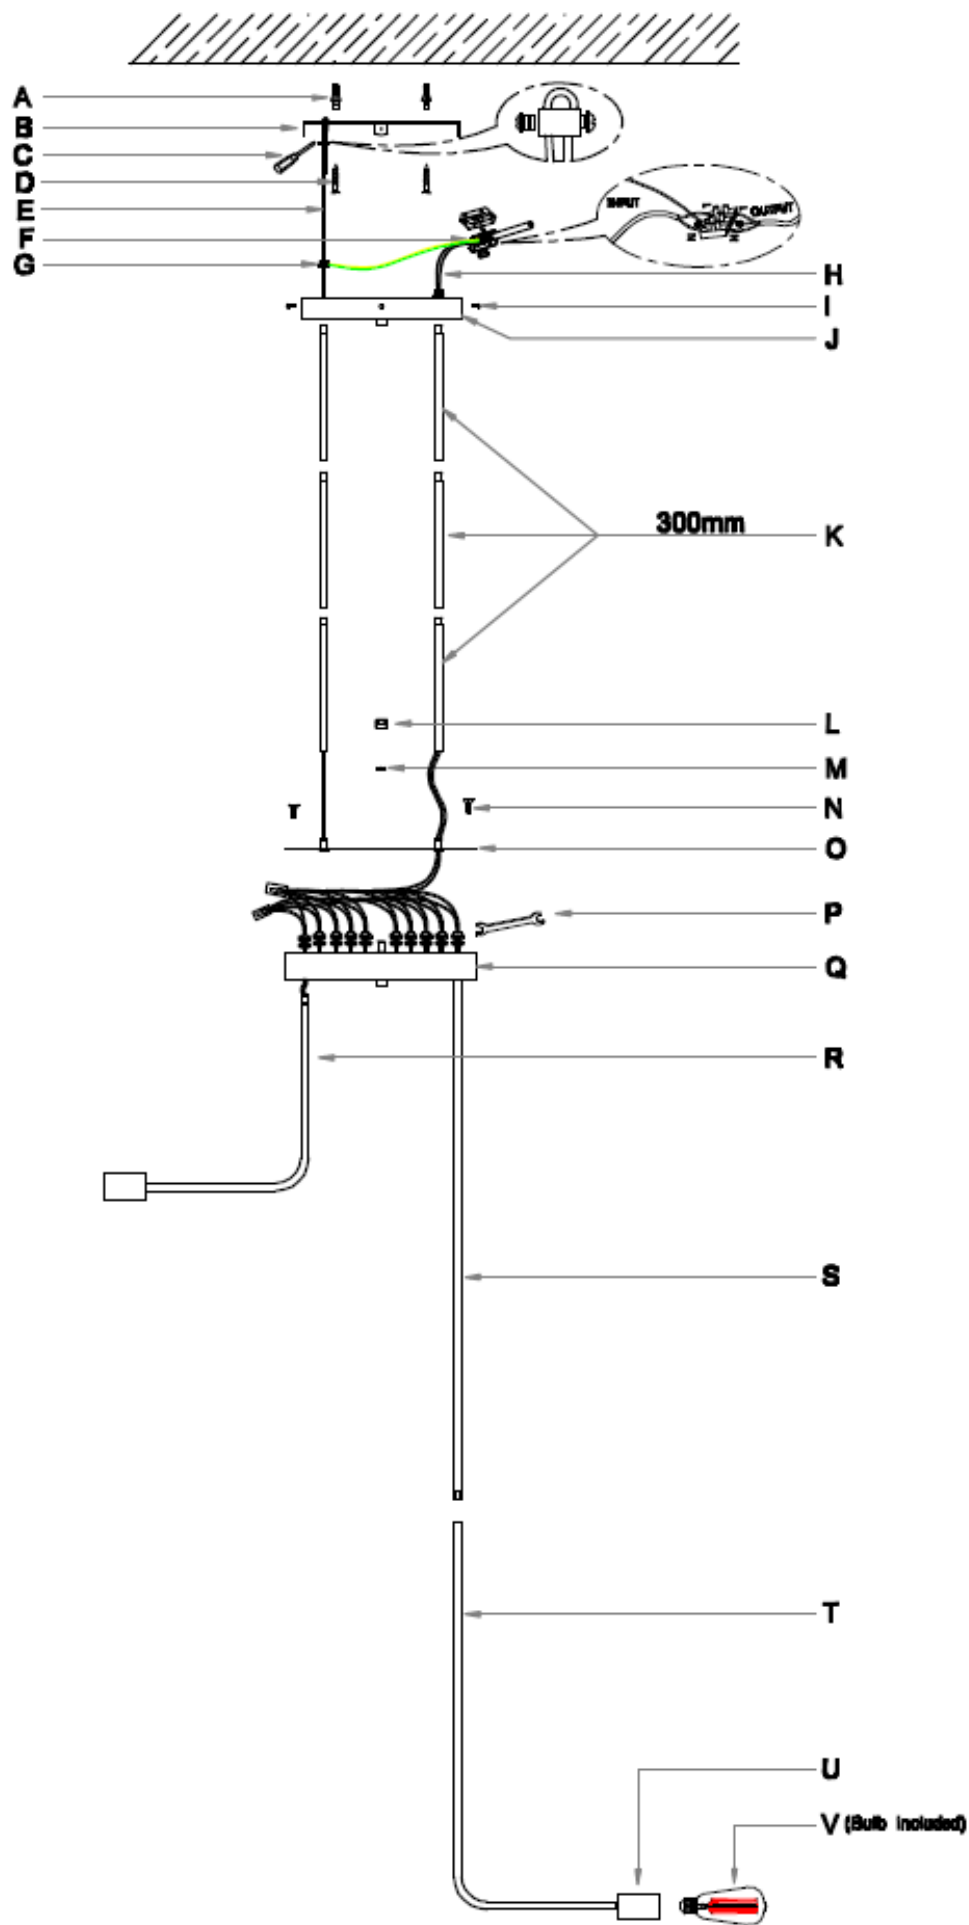

FOR CLOSE TO CEILING INSTALLATION (Refer to the steps given on page 1 followed by the steps below)

For close to ceiling installation, some of the components need to be removed from the fitting and re-assembled again.

REFER TO PREVIOUS DIAGRAM FOR COMPONENTS

16. Join the arms (Q) and the straight tubes (P).

17. Spread the fitting arms (O) out, so they are evenly spaced and match the base (N). Fix the arm (O) to the base (N) tightening by the spanner (M).

NOTE: Adjust the arms apart from each other to make sure all are straight and evenly surround the base after locked in position.

18. Make the holes on plate and base are lined up properly, and fix the plate (L) to the base (N) by tightening the screws (K).

19. Fix the upper canopy (J) to the plate (L), with nut (G) to secure.

20. Install the safety cable (E) onto the mounting bracket (B) and secure using the cable interlocker (C).

NOTE: The full load/weight of the pendant must always be on the Safety cable (E) suspension not the cord.

21. Use the mounting bracket (B) as a template to mark the screw positions on the ceiling.

22. Install the mounting bracket (B) onto the ceiling by using appropriately sized mounting screws (D) and anchors (A). Ensure the screws (D) and anchors (A) used are suitable for the mounting surface and surrounding environment.

23. Remove the cover from the terminal block (F) and connect the mains supply wire.

Mains Supply Wire

Earth – Yellow/Green

Neutral – Blue

Live – Brown

Luminaire Wire / Terminal Block

Yellow/Green or 

Blue or N

Brown or L


24. Ensure the wires are secure and no bare wires are exposed. Install the cover back over the terminal block (F).

25. Install the upper canopy (J) onto the mounting bracket (B) and secure by tightening the screws (I).

26. Install globes (S - not included) into the lamp holders (R). Do not exceed the maximum wattage rating.

27. After the installation, switch on the fitting to test and enjoy your new lighting product.

NOTE: Keep the components aside, they will be required to re-assemble later.

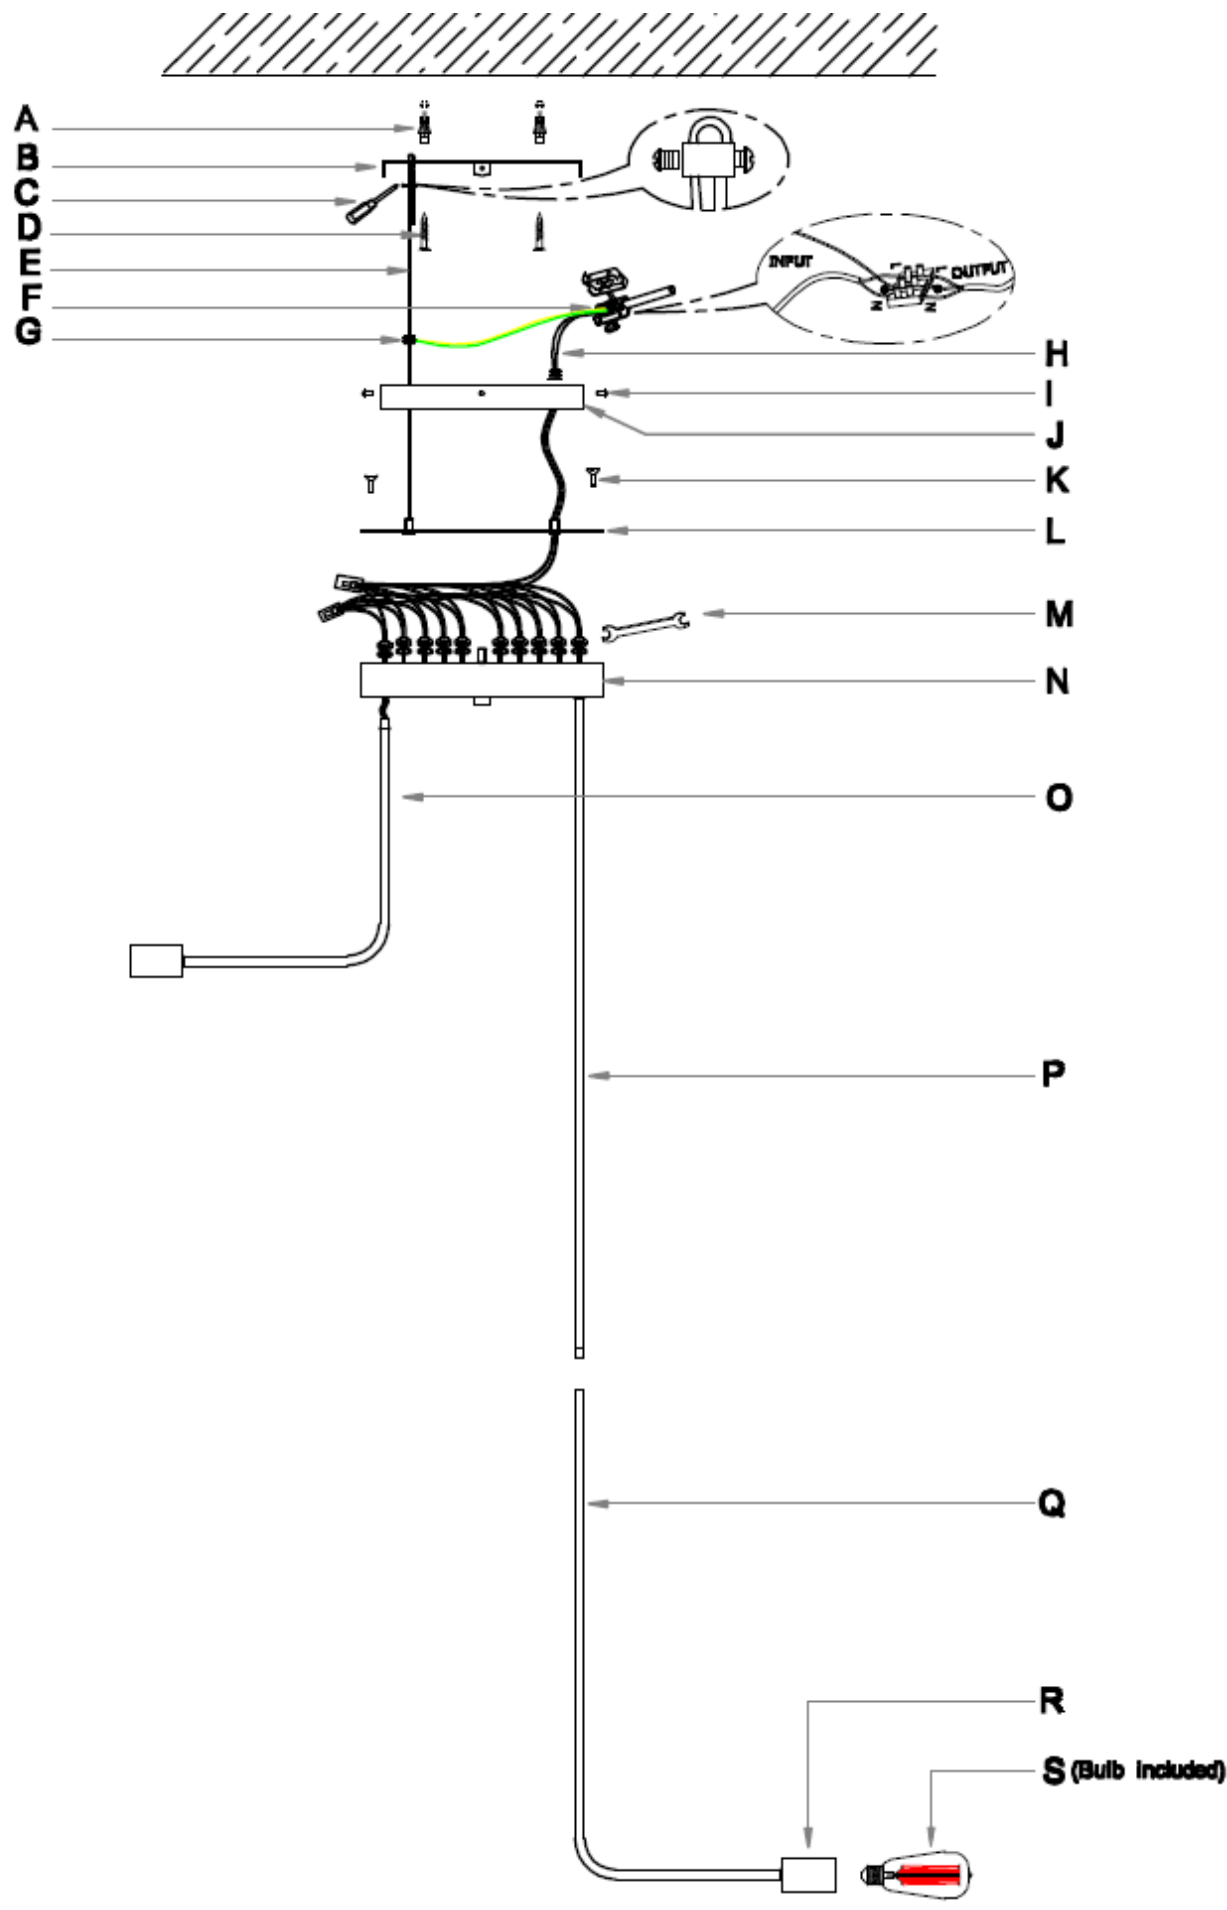

Installation Instructions

Safety Tips

- Always ensure the power is OFF and the fitting has cooled down before performing any maintenance, cleaning, changing the globe or making any adjustment to the fitting.
- To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
- Select a suitable location away from liquids and hazards.
- Ensure that the fitting does not come in contact with corrosive chemicals, etc.
- To clean, wipe with a damp clean cloth. Never soak the fitting with water.

Specifications

SKU #	3468
Colours	Matt Black
Rated Voltage	220-240V~ 50Hz
Rated Wattage	Max. 10W LED
Lamp Holder	ES / E27
Weight	18kgs
Dimensions	Dia:870mm H1800mm Suspension: 900mm MAX