

Installation Instructions for 4805 & 4804
Rated Voltage 220-240V, 50Hz

PLEASE READ AND SAVE ALL INSTRUCTIONS CAREFULLY BEFORE USING THE PRODUCT

WARNING - to reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation.

INSTALLATION REQUIREMENTS:

- **Must be installed by a Licensed Electrician.**
- **Must be installed according to the current wiring rules.**
- **Do not exceed the maximum wattage rating, as this may cause overheating.**
- **Suitability for use “outdoors”IP44.**
- **Insulation class: CLASS II**

INSTALLATION DIRECTION:

- Check whether the fitting has been damaged during transport. Do not operate/install any product which appears damaged in any way. Return the complete product to the place of purchase for inspection, repair or replacement.
 - Ensure the power connection is off for your own safety.
 - Place all the components on a smooth surface and make sure there are no components missing before assembly.
 - Select a suitable location for installation. The mounting point must be able to support 4 times the weight of the fitting.
-
1. Remove the mounting box from the fitting by loosening the screws.
 2. Use the mounting box to mark holes onto the wall and drill holes into the wall.
 3. Put the plastic anchors (I) into the holes. Secure the mounting box (H) onto the wall using screws (G) provided. Ensure the screws used are suitable for the mounting surface.
 4. Connect the mains supply wire to the light fitting using the terminal block provided (A). Ensure that the wires are secure and no bare wires are exposed.

Mains Supply Wire

Neutral – Blue or Black


Live – Brown or Red

Fitting Wire

Corresponding terminal on the lampholder Marked “N”

Corresponding terminal on the lampholder Marked “L”

5. Install the bulb (F - not included) to the lamp holder.(Ensure all seals are in correct position to maintain IP44 rating. Note: Do not exceed recommended bulb wattage.)
6. Attached the plastic cover (E) to the mounting box with screws (D) to secure.
7. Fix the surface cover (C) to the plastic cover with screws (B) to secure.
8. Turn on power and enjoy your new lighting product.

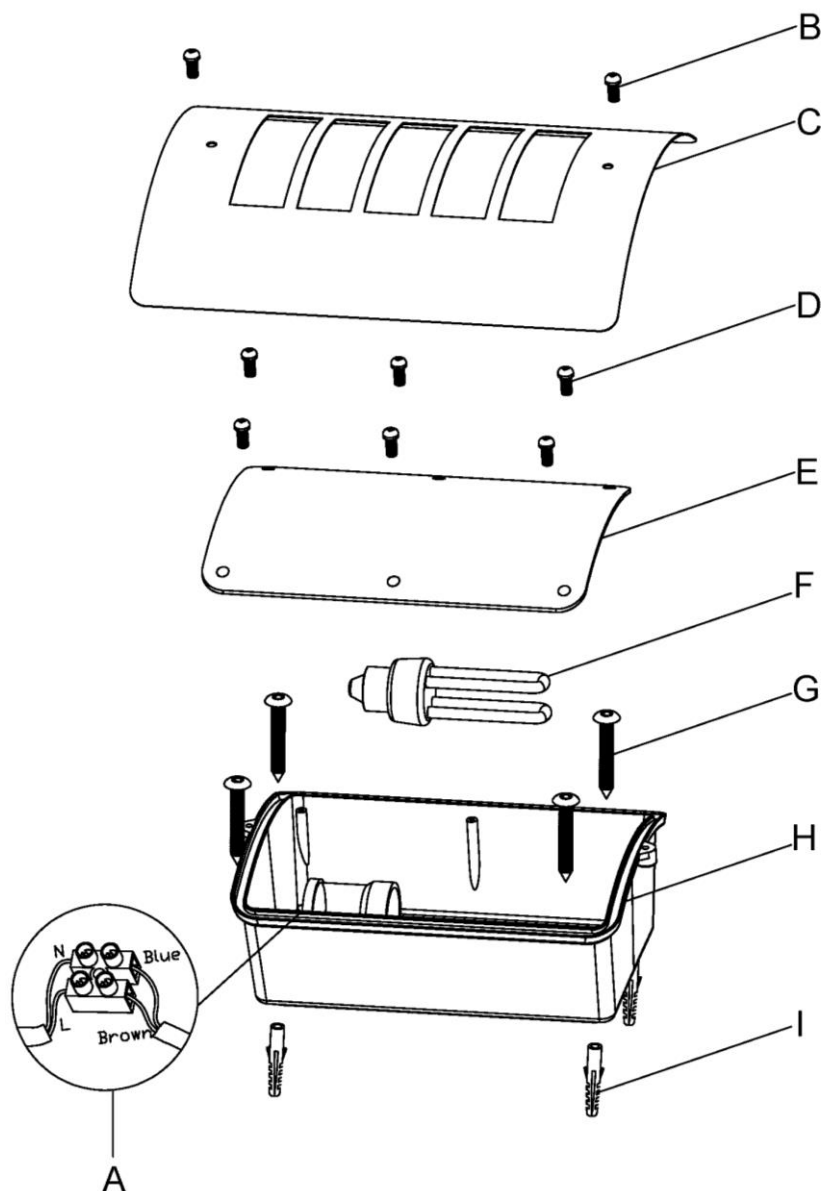

TIPS

1. To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power.
2. Handle the fitting and cover/shade with care to avoid breakage.
3. When changing or cleaning bulbs, turn OFF power and allow to cool. Do not touch bulbs with bare hands, use gloves or a tissue.
4. Find a suitable location away from liquids and hazards.
5. Ensure that the fitting does not come in contact with corrosive chemicals, etc.
6. To clean, wipe with a damp clean cloth. Never soak the fitting with water.

SPECIFICATIONS:

Code#	4805	4804
Colour/Finish	Stainless steel	Sanded black
Rated Voltage	220-240V~, 50Hz	
Rated Wattage	Max. LED 10W	
Lamp Holder	ES/E27	
Dimensions	W: 200mm E:90mm H:340mm	

MAINTENANCE OF OUTDOOR LIGHTS

BEFORE INSTALLING AN OUTDOOR LIGHT FITTING:

Ensure that all screws and movable parts are covered in Copper slip, Inox or Vaseline, this will help prevent oxidization and allow for easy maintenance of replacement bulbs.

In coastal locations the treatment must be repeated four times a year.